

SPECIFICATIONS

Housing Material:

316 Stainless Steel
6,000 PSI
17-4 Stainless Steel
10,000 PSI

Element Media:

304 Stainless Steel Mesh
10, 25, 40, 75 Micron ABS
Glass Fiber
3, 5, 10, 25 Micron ABS
Cellulose
10, 25, 40 Micron ABS

Flow Rate:

7.5 GPM (100 SSU oil)

Pressure Ratings:

	316SS	17-4SS
Operating	6,000	10,000
Proof	9,000	15,000
Burst	24,000	40,000

Element Temperature Range:


304 Stainless Mesh: -425°F to +1,000°F
Glass Fiber: -70°F to +350°F
Cellulose: -65°F to +275°F

O-Ring Temperature Range:

Buna N: -40°F to +250°F
Viton: -20°F to +350°F
Ethylene Propylene: -65°F to +300°F
Teflon™: -148°F to +400°F
Kalrez™: -40°F to +600°F

Teflon™ and Kalrez™ are registered trademarks of DuPont

HOW-TO-ORDER

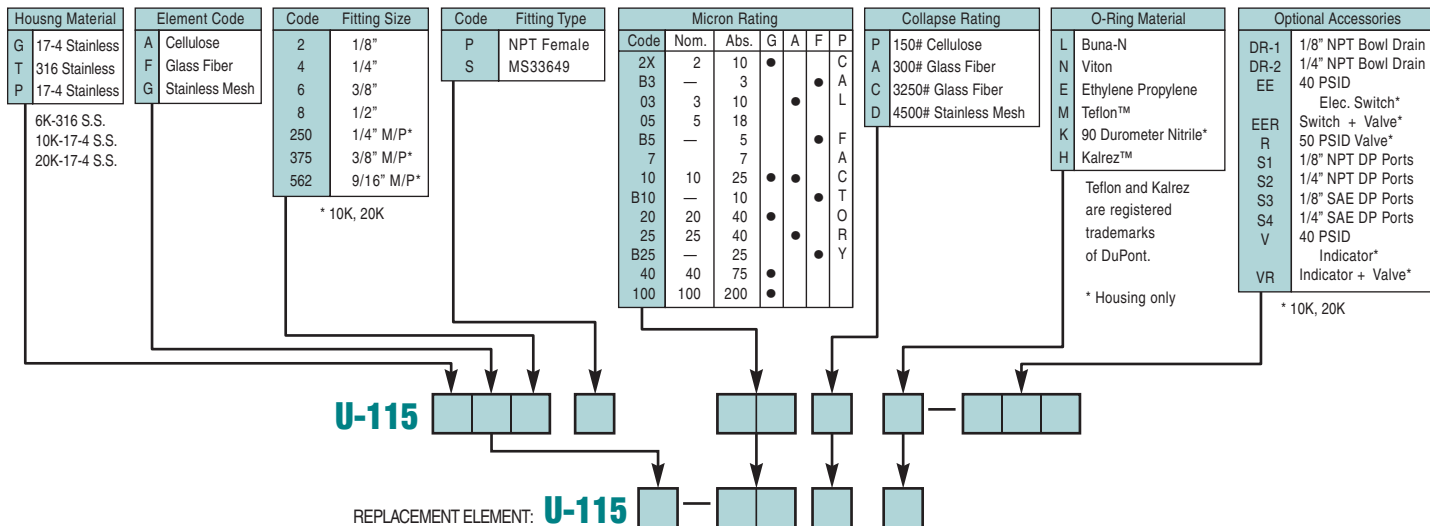

DISTRIBUTED BY:



NORMAN FILTER COMPANY



MJ Systems, Norman Filters Distributor
421 N 10th St • La Porte, TX 77571
Off (281) 842-7600 • Fax (281) 842-7601
www.mjsusa.com • sales@mjsusa.com